

Model : MB-5535-4-30W, MB-5535-8-60W

Applications: Widely used in Commercial Lighting, Airports, Office Spaces, Educational Institutes, Hotels and Restaurants, Retail Shops, Showrooms and Malls, Banks.


| Electrical Parameters | 30W | 60W |
|---------------------------|-------------------|-------------------|
| Input Voltage | 100-285V AC | 100-285V AC |
| Rated Power | 30W (1200mm) | 60W (2400mm) |
| Efficiency | >90% | >90% |
| Power Factor | >0.90 | >0.90 |
| Harmonics | < 10% | < 10% |
| LED Details | | |
| Mounting Type | Recess | Recess |
| Led Viewing Angle | 120 degrees | 120 degrees |
| Colour Temperature (cct) | 3000k/4000k/6000k | 3000k/4000k/6000k |
| Lumens | 100 Lm/ W | 100 Lm/ W |
| Luminous Flux | 3000 lm | 6000 lm |
| CRI | >80 | >80 |
| Protection Parameters | | |
| Over- Current Protection | Yes | Yes |
| Short- Circuit Protection | Yes | Yes |
| Over- Voltage Protection | Yes | Yes |

Features

- Super bright output indoor lights
- Equipped with non- flickering drivers & high lumens SMDLED chip
- Long life span up to 50k hours, low decay & low maintenance
- High grade aluminium extrusions with quality surface painting
- Screw-less ABS End caps with zero light leakage
- High efficiency PMMA & even light distribution
- Dimmable driver supports for all products

NOTE: Customization possible as per requirement

LUMINOUS INTENSITY DISTRIBUTION

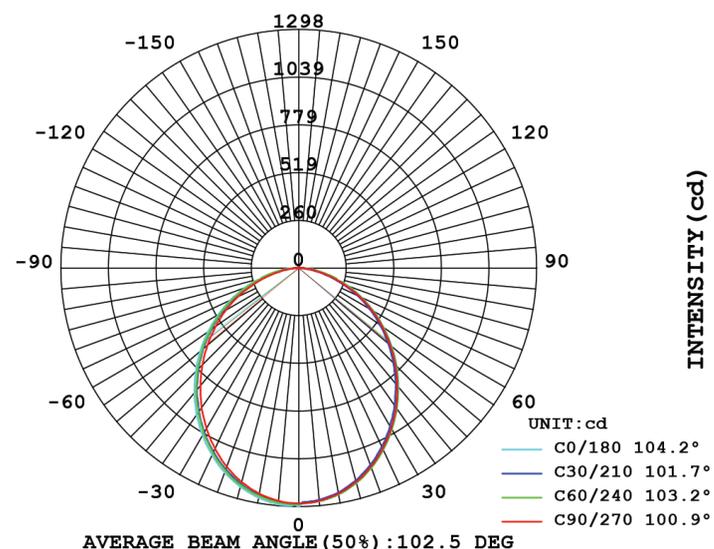


Accessories



Spring Fastener

Optional



30W

Dimension

55mmx35mmx1200mm



60W

Dimension

55mmx35mmx2400mm

